

SP-4902

Scope Mount Ø34 H38mm/1.5" 9MIL PIC

Picatinny mount for use with NV Equipment

Rings: 34 mm


Tilt: 9 MIL/30 MOA Height: 38 mm/1.5" Length: 121 mm/4.76" Weight: 248 g/8.7 oz

Interfaces: 7 sets

EAN: 7340150700409

NSN: 1240-17-124-1397 (Gen 1)

The IDEAL SCOPE MOUNT SYSTEM series of mounts feature seven set of interfaces to attach any of more than 40 different accessories, and has a bubble level integrated in the rear plane of the mount body to prevent canting of the rifle. The

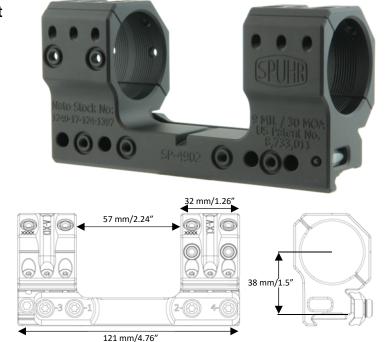

rings are diagonally cut for increased visibility of the elevation and windage turrets (US Patent 8,733,011).

The mounts are machined from billet 7075 T651 aluminum and all aluminum parts are hardcoat anodized. The Torx 20 ring and clamping screws are zinc-nickel coated for corrosion resistance. The screws come pre-waxed from the factory to ensure proper torque values.

The mount is shipped with a manual and a "wedge" leveling key.

NOTE:

The SP-4902 is designed for use with 56 mm objectives on rifles with MIL-STD-1913 or STANAG 4694 rails, and is especially suitable for extended Picatinny rails combined with night vision equipment. The SP-4902 will fit most 34 mm scope tubes except for scopes with extended erector housings, such as the US Optics TPAL/EREK and the Nightforce BEAST.

Spuhr i Dalby AB

Phone: +46 46 712 012
Web: www.spuhr.com

Address: Terminalvägen 19

SE-246 42 Löddeköpinge

Sweden

CONTACT