




SR-4006

Separate Rings $\text{\O}34$ H34mm/1.35"

Separate rings for lightweight mounting solutions

Rings: 34 mm
Tilt: 0 MIL/MOA
Height: 34 mm/1.35"
Length: 32 mm/1.26"
Weight: 201 g/7.1 oz
Interfaces: 7 sets
EAN: 7340150700744

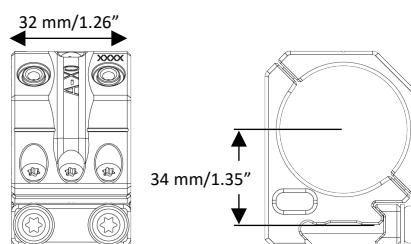

The **IDEAL SCOPE MOUNT SYSTEM** series of rings feature **seven sets of interfaces to attach any of more than 40 different accessories** and has bubble levels integrated into the front and rear plane of the rear ring to prevent canting of the rifle. The rings are diagonally cut for increased visibility of the elevation and windage turrets (US Patent 8,733,011).

The rings are machined from billet 7075 T651 aluminum and all aluminum parts are hardcoat anodized. The Torx 20 ring and clamping screws are zinc-nickel coated for corrosion resistance. The screws come pre-waxed from the factory to ensure proper torque values.

The mount is shipped with a manual and a leveling kit.

NOTE:

The SR-4006 rings can be mounted for either left or right-handed use thanks to bubble levels on both the front and back side of the rear ring.

CONTACT

Spuhr i Dalby AB

Phone: +46 46 712 012

Web: www.spuhr.com

Address:

Terminalvägen 19

SE-246 42 Löddeköpinge

Sweden